





Design Pressure	U-Value*
Single Hung: 60	Single Hung: as low as .30 <sup>#</sup>
Fixed: 90	Fixed:
Air Infiltration	SHGC*
Single Hung: <0.10	Single Hung:
Fixed:	Fixed:
Water Resistance	CR*
Single Hung: 12	Single Hung:
Fixed:	Fixed:
OITC <sup>X</sup>	))) Single Hung: 31-32
))))))))))))))))))))))))))))))))))))	Fixed:
*-Ranges based on multiple Low-E/Argon I.G. combinations <sup>x</sup> -Ranges based on multiple I.G. combinations	

#Thermal test numbers shown are projected. Official testing in progress as of October, 2023

## **FEATURES:**

- Historically-correct bevel exterior frame
- Architectural grade aluminum frame
- Thermally-broken frame and sash with pourand-debridge technology
- ► No fin main frame for retro-fit purposes
- Alternative model with Nail fin (H655 Series)
- ► 1" insulating glass
- ► Heavy-duty Class 5 balancers
- Auto lock sill
- Standard High-Performance 2604 Powder Paint Finish (an FGIA Specification)
- Optional Upgrade to 2605 Powder Paint Finish (an FGIA Specification)
- ► 30+ "Quick-Pick" colors, with unlimited custom colors available


## www.QuakerCommercialWindows.com


Information listed is deemed accurate as of date shown. Quaker Windows reserves the right to change or discontinue any product, feature or option without notice .






Single Hung (AW60)

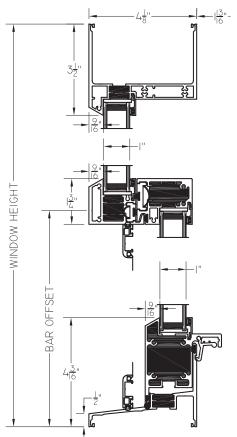

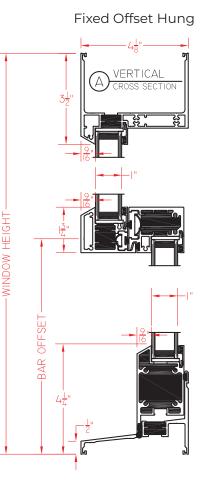



All ratings listed are NAFS certified.



Made in America: All Quaker products are designed and manufactured in the United States at our state-of-the-art facilities in Freeburg, MO and Eldon, MO.