

Single Hung | Double Hung | Horizontal Slider | Fixed



Product Material Vinvl





Rating Hung Models: LC35 LC35 LC35 Slider: Fixed:



Design Pressure Single Hung: 35 Double Hung: 35 Slider: 35 Fixed: 35	U-Value* Single Hung: .2334 Double Hung: .2333 Slider: .2335 Fixed: .2032
Air Infiltration Single Hung: <.30 Double Hung: <.30 Slider: <.30 Fixed: <.30	SHGC* Single Hung: .1351 Double Hung: .1250 Slider: .1349 Fixed: .1353
Water Resistance Single Hung: 5.25 Double Hung: 5.25 Slider: 5.25 Fixed: 5.25	* CR* Single Hung: 40 - 65 Double Hung: 41 - 65 Slider: 40 - 65 Fixed: 41 - 68
OITCX Single Hung: Contact Quaker Double Hung: Contact Quaker Slider: Contact Quaker Fixed: Contact Quaker	STC ^X Single Hung: Contact Quaker Double Hung: Contact Quaker Slider: Contact Quaker Fixed: Contact Quaker

*-Ranges based on multiple Low-E/Argon I.G. combinations x-Ranges based on multiple I.G. combinations

FEATURES:


- Commercial grade vinyl window for light commercial applications
- 3/4" insulating glass
- Mitered and welded corners
- ► Integral nail fin
- ▶ Block & Tackle balancers in Hung models
- ▶ Brass rollers with stainless steel axle pins (Sliding model)
- ▶ Steel reinforcements added throughout for additional strength
- ► Numerous mull systems for multi-unit combos
- ► White or Sandstone vinyl
- Optional painted exterior (meets FGIA 615 finish)
- Textured laminate options for exterior and interior
- Use up to 4 floors with standard fin-install. Up to 6 stories with sill pan or receptor/subsill installation accessories



V250 COMMERCIAL VINYL SERIES


Single Hung (LC35)

Test size = 36" x 84"

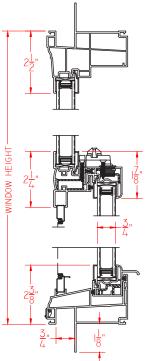


Double Hung (LC35)

Test size = 36" x 84"

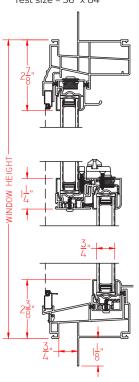


Fixed (LC35)

Test size = 56" x 56"



Horizontal Slider (LC35)

Test size = 63" x 44"



All ratings listed are NAFS certified.





QuakerCommercialWindows.com 1-800-347-0438 Commercial@quakerwindows.com