




## Casement | Project-Out | Fixed



Frame Depth **3**  $\frac{1}{4}$ "

Rating Casement: CW50 Project-Out: CW50 Fixed: CW50

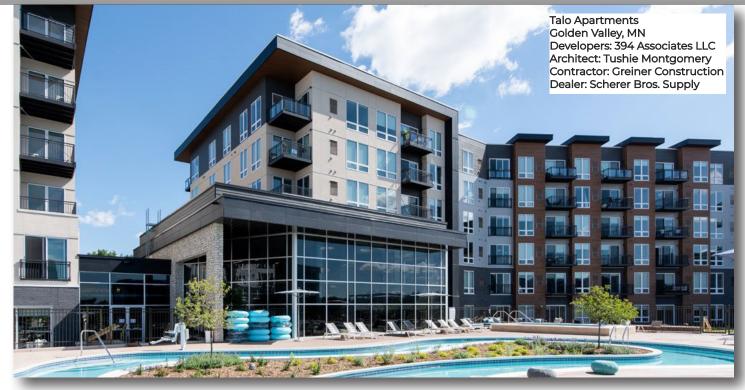

| Design Pressure  | U-Value*  |
|--|---|
| Casement: 50   | Casement: .2327   |
| Project-Out: 50  | Project-Out: .2328  |
| Fixed: 50  | Fixed: .2128  |
| Air Infiltration   | SHGC*   |
| Casement: <.30   | Casement: .1042   |
| Project-Out: <.30  | Project-Out: .1042  |
| Fixed: <.10  | Fixed: .1355  |
| Water Resistance   | * CR*   |
| Casement: Up to 7.5  | Casement: 47 - 77   |
| Project-Out: Up to 7.5   | Project-Out: 45 - 77  |
| Fixed: Up to 7.5   | Fixed: 46 - 78  |
| OITC <sup>×</sup><br>)))<br>Casement: 29 - 33<br>Project-Out/Fixed<br>Combination: 29                                | STC <sup>×</sup><br>))Casement: 34 - 39<br>Project-Out/Fixed<br>Combination: 35 |
| *-Ranges based on multiple Low-E/Argon I.G. combinations<br><sup>x</sup> -Ranges based on multiple I.G. combinations |   |

## FEATURES:

- Architectural grade vinyl frame
- Fusion welded sash and frame corners
- Integral Nail Fin
- ▶ 1" Insulating Glass
- Clean exterior appearance
- Multi-Point locking system with heavy commercial 4-bar arms on operating models
- Wide or Narrow sightlines on fixed models
- White and Sandstone vinyl (exterior/interior)
- Optional painted exterior (meets FGIA 615 finish)
- Textured laminate options for exterior and interior
- Use up to 8 floors with nail fin, up to 11 floors with receptor/subsill system
- Impact rated versions (V700 Series)

## www.QuakerCommercialWindows.com








Project-out (CW80)

Test size = 60" x 32"

## Casement (CW50)

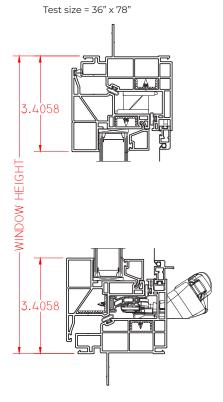













Fixed Narrow (CW50)

Fixed Wide (CW50) Test size = 72" x 84"





QuakerCommercialWindows.com 1-800-347-0438 Commercial@quakerwindows.com

Made in America: All Quaker products are designed and manufactured in the United States at our state-of-the-art facilities in Freeburg, MO and Eldon, MO.