





Swing Door | Fixed

Rating Inswing: CW50 Outswing: CW50 Fixed: CW50



Design Pressure	U-Value*
Inswing: 50	Inswing: 0.24 - 0.50#
Outswing: 50	Outswing: 0.24 - 0.50#
Fixed: 50	Fixed: 0.24 - 0.50#
Air Infiltration	SHGC*
Inswing: <.30	Inswing:
Outswing: <.30	Outswing:
Fixed: <.30	Fixed:
Water Resistance	* CRF*
Inswing: 7.5	Inswing:
Outswing: 7.5	Outswing:
Fixed: 7.5	Fixed:
OITC* ))) Inswing: Outswing: Fixed:	))) Inswing: Outswing: Fixed:
*-Tests pending as of 9-2023 #-ranges shown are preliminary and based on multiple Low-E/argon gas	

## combinations

## **FEATURES:**


- ► Extruded, architectural grade uPVC vinyl frame
- 1" insulating glass
- Inswing or Outswing single-panel operation
- ▶ Standard Widths: 2<sup>8</sup>, 3<sup>0</sup>, 3<sup>2</sup>
- ▶ Standard heights: 6<sup>8</sup>, 6<sup>10</sup>, 8<sup>0</sup>
- ► Max sizing: 48" x 96"
- ▶ Minimum sizing: 32" x 72"
- ► 2<sup>5</sup>/<sub>8</sub>" threshold. Optional ADA threshold w/10" bottom rail.
- ► Multi-point WHS hardware.
- ► Butt hinges 3 axis adjustability
- ► Keyed hardware option
- ► White or Sandstone vinyl
- Optional painted exterior (meets FGIA 615 finish)
- ► Textured laminate options for exterior and interior
- ► Fixed Transom and Sidelite


## www.QuakerCommercialWindows.com


Information listed is deemed accurate as of date shown. Quaker Windows reserves the right to change or discontinue any product, feature or option without notice.








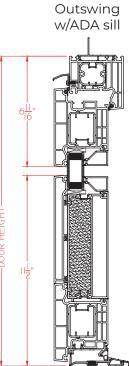





8

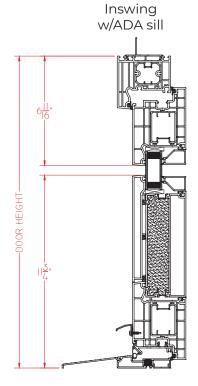

Outswing Models (horizontal cross section)

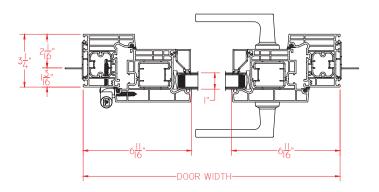

Inswing Models (horizontal cross section)

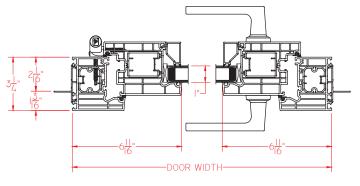



QuakerCommercialWindows.com 1-800-347-0438 Commercial@quakerwindows.com