



V200 SERIES PICTURE WINDOW (FIXED)

FEATURES

- ◇ **Commercial Framing System**
 - 3 1/4" main frame
 - 0.060" wall thickness of frame, 0.070" wall thickness of sash
- ◇ **Enhanced Design**
 - Mitered and welded corners
- ◇ **Glazing**
 - 3/4" insulated glass
 - SSB Glass
- ◇ **Colors**
 - White or Sandstone vinyl (interior/exterior)

BENEFITS

- ◇ The capacity to match exterior colors for unique project facades
- ◇ The ability to facilitate large sizes for taller and wider window openings

OPTIONS

- ◇ **Available Configurations**
 - Picture window
 - Geometric shapes
- ◇ **Muntin Choices**
 - Internal or simulated divided lites available
- ◇ **Nailing Fin**
- ◇ **Glazing**
 - Multiple Low-E and argon glazing choices
 - Capillary tubes
 - Wide variety of glazing, tinting and thickness options
- ◇ **Panning & Trim Choices**
 - Wide variety of panning, receptor and trim available
- ◇ **Mulling**
 - Wide variety of structural mulls
- ◇ **Colors**
 - High-performance Textured Black laminate (interior/exterior)
 - High-performance Textured Black laminate (exterior only with White vinyl or Textured Black laminate interior)
 - High-performance Textured Dark Bronze laminate (exterior only with White vinyl interior)
 - Twelve painted exterior colors (with White or Sandstone vinyl interior)
 - Unlimited custom painted exterior colors

PERFORMANCE

- ◇ Structural & Thermal (test reports or thermal simulations available upon request)

| Model | Picture Window (Fixed) | Casement Picture Window |
|---|------------------------|-------------------------|
| NAFS Rating | R-35 | R-40 |
| Structural Load P.S.F. | 52.63 | 60.15 |
| Air at 50 MPH (cfm/ft ²) | 0.01 | 0.01 |
| Water (No Penetration) P.S.F. | 6.06 | 6.06 |
| U-Value (ranges based on multiple Low-E/Argon combinations) | 0.22-0.28 | 0.22-0.27 |
| SHGC (ranges based on multiple Low-E/Argon combinations) | 0.15-0.53 | 0.14-0.50 |
| Window Test Size | 48" x 48" | 48" x 48" |

Our products are tested to the standards of and certified by some of the foremost organizations in the fenestration industry.








V200 Series 3 1/4" Frame Depth Picture Window (Fixed)

V200 PICTURE WINDOW


This document contains confidential and proprietary information intended for the private use of Quaker.
© 2016 Quaker Window Products Co., INC. All rights reserved.
Quaker reserves the right to change any/all designs without notice. Due to periodic re-certification requirements, result shown may vary.

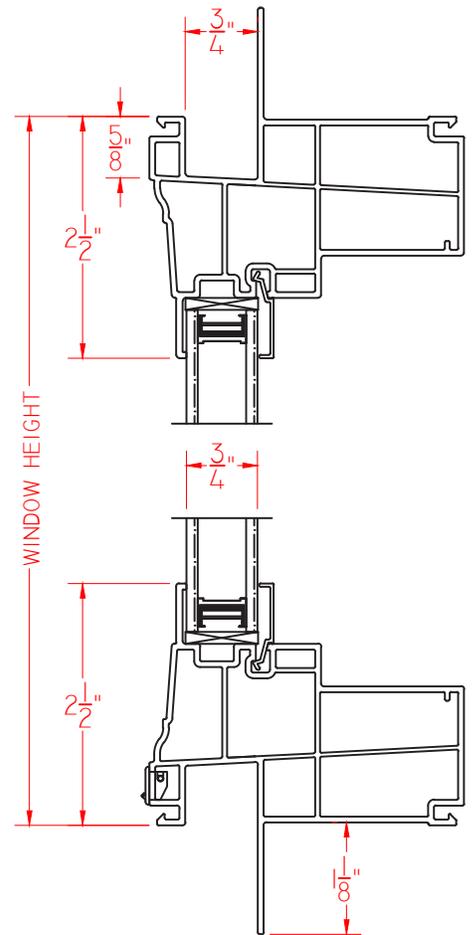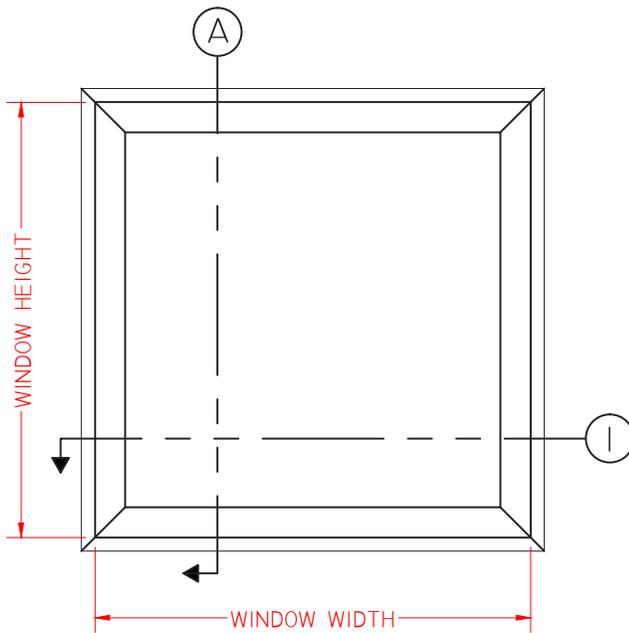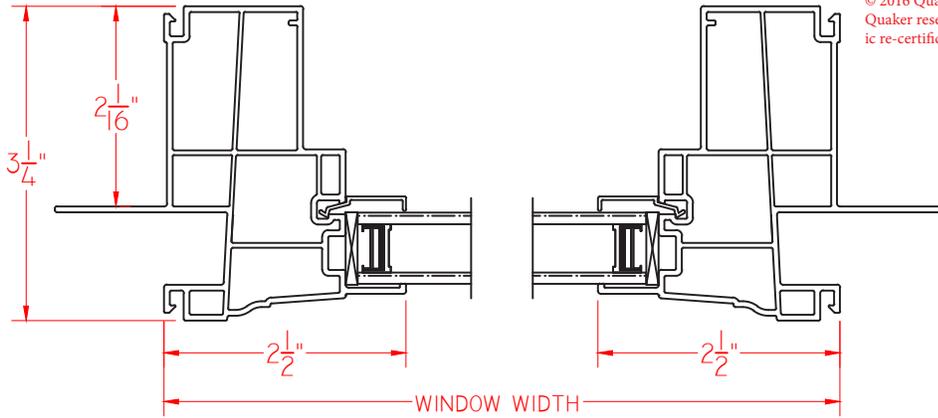

SCALE 1:2

Our products are tested to the standards of and certified by some of the foremost organizations in the fenestration industry.






V200 Series
3 1/4" Frame Depth
Picture Window (Fixed)



V200 CASEMENT DIRECT SET PICTURE WINDOW

This document contains confidential and proprietary information intended for the private use of Quaker.
 © 2016 Quaker Window Products Co., INC. All rights reserved.
 Quaker reserves the right to change any/all designs without notice. Due to periodic re-certification requirements, result shown may vary.

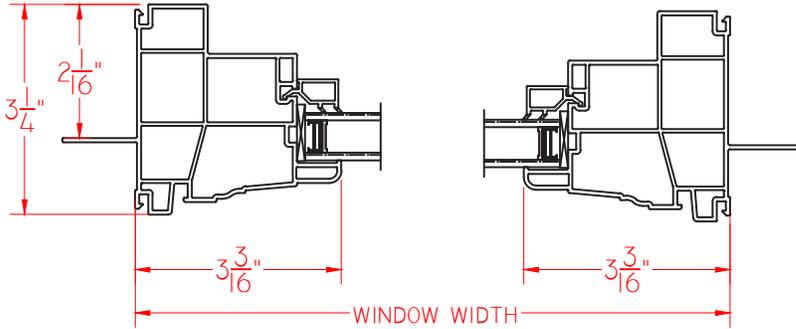

① HORIZONTAL CROSS SECTION

Ⓐ VERTICAL CROSS SECTION

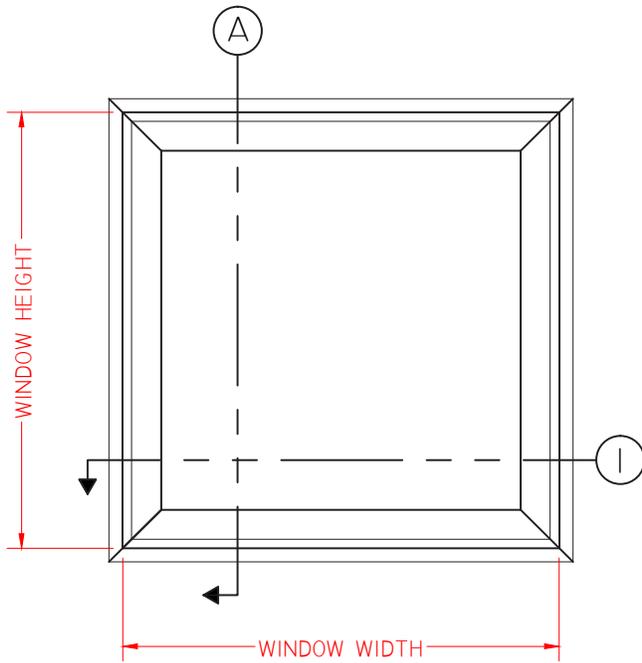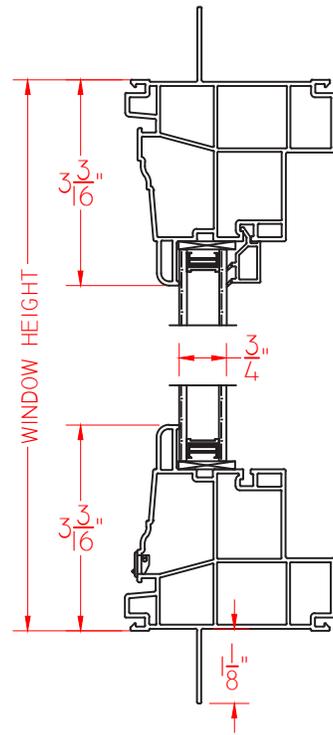

ELEVATION SCALE 3/4" = 1'-0"

SCALE 1:3


Our products are tested to the standards of and certified by some of the foremost organizations in the fenestration industry.







V200 NARROW DIRECT SET PICTURE WINDOW

This document contains confidential and proprietary information intended for the private use of Quaker.
© 2017 Quaker Window Products Co., INC. All rights reserved.
Quaker reserves the right to change any/all designs without notice. Due to periodic re-certification requirements, result shown may vary.

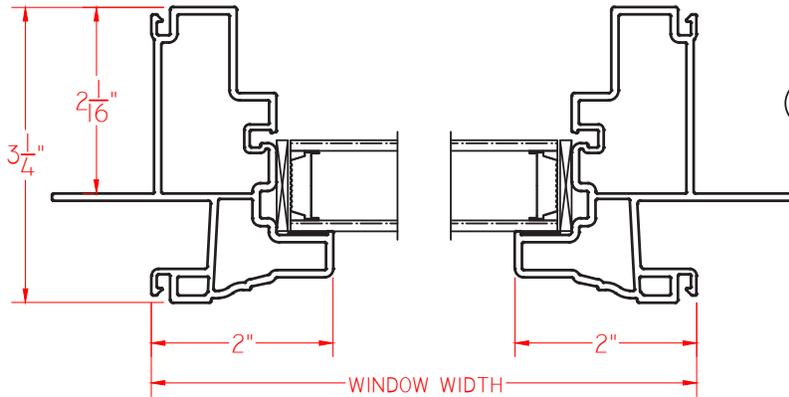

A VERTICAL CROSS SECTION

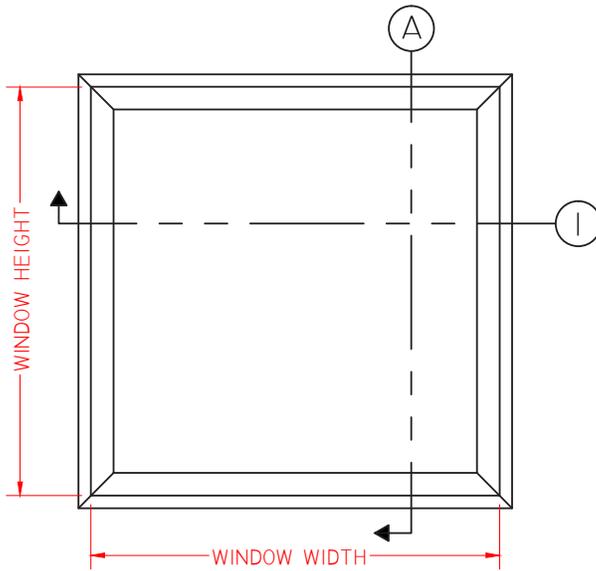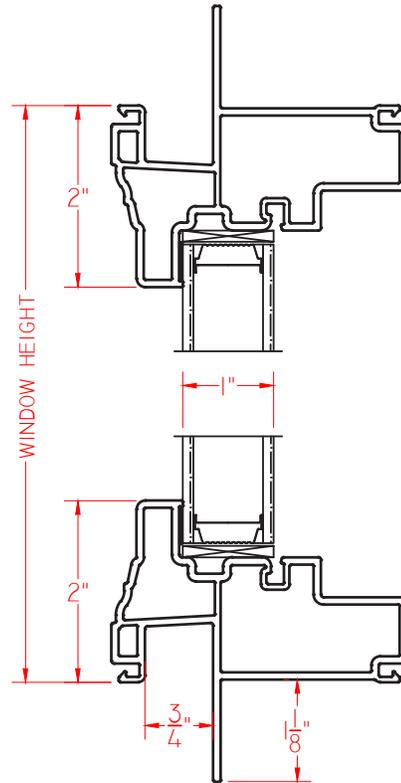

ELEVATION SCALE 3/4" = 1'-0"

SCALE 1:2